



REFERENCE RESEARCH

Outdoor Ledwall Display

made in **SANSI**™

True, realistic and brilliant colors.

SANSI, the most advanced Led Technology Hardware available.

PRODUCTS FEATURES

- ❑ Wide Viewing Angles
- ❑ Dynamic Scanning
- ❑ No flickering
- ❑ Modular Design for easy installation on maintenance
- ❑ Highly Compatible Operating Software

CARATTERISTICHE

- ❑ Ampio angolo di visibilità
- ❑ Scanning Dinamico
- ❑ Flickering assente
- ❑ Moduli disegnati per una facile installazione e manutenzione
- ❑ Software operativo altamente compatibile

MAIN APPLICATIONS


- ❑ Sport Stadiums
- ❑ Exhibition Centers
- ❑ Banking
- ❑ Media Center, TV Broadcasting Studios
- ❑ Advertisement on Buildings
- ❑ Mass Transit Stations, Piers, Airports
- ❑ Hotel, Business Venues

APPLICAZIONI PRINCIPALI

- ❑ Stadi sportivi
- ❑ Aree Espositive, Centri Fiera
- ❑ Banche
- ❑ Studi produzione Video, Studi Televisivi
- ❑ Pubblicità su edifici
- ❑ Stazioni, Metropolitane, Aeroporti
- ❑ Hotel, Sale Conferenze




Pitch	Display matrix (h x b)	Pixel configuration	Dimensions (h x b)	Panel diagonal	Square meters	Resolving rate	Brightness	Average power*	Weight
mm	pixel		mm	mm	m ²	pixel/ m ²	nits	W	Kg
14	48 x 64	1R1G1B	672 x 896	1120	0,60	5.102	5.000	500	35
16	48 x 64	2R1G1B	768 x 1024	1280	0,79	3.906	5.000	500	44
20	48 x 64	2R1G1B	960 x 1280	1600	1,23	2.500	5.000	500	65
25	32 x 32	2R1G1B	800 x 800	1131	0,64	1.600	4.000	225	35
28	32 x 32	4R2G1B	896 x 896	1267	0,80	1.275	5.000	350	40
31,25	32 x 32	4R2G1B	1000 x 1000	1414	1,00	1.024	4.000	350	60
33,5	32 x 32	3R3G2B	1072 x 1072	1510	1,09	892	5.000	400	70

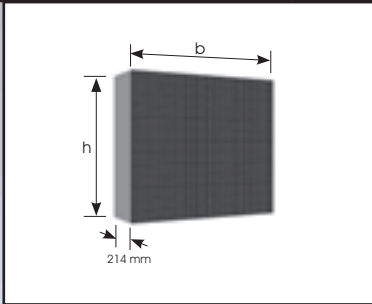

* typical power consumption (50% of maximum)

SYSTEM INTERCONNECT DIAGRAM

- Viewing angle horizontal and vertical 140° h, 20° up, 40° down
- Video frame rate 60 frames per second
- Refresh rate >300 Hz
- Colours 4,4 trillions
- Video processing 12 bit
- Colour processing 16 bit
- Operating temperature -30 to 50 C°
- Lifetime 60.000 h

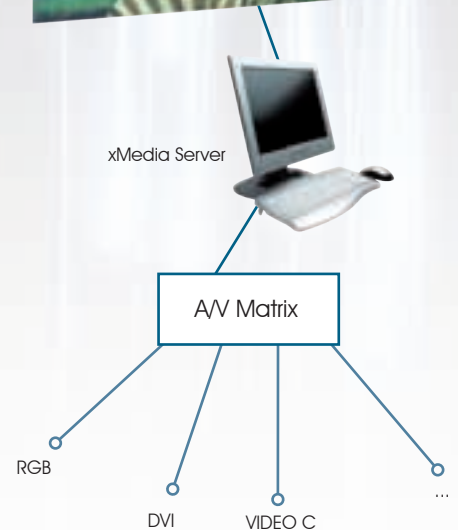

EXCLUSIVE DISTRIBUTOR